



PRESSE IDRAULICHE
HYDRAULIC PRESSES

SERIE CON POMPA A MANO A DUE VELOCITÀ
TWO SPEED HAND PUMP RANGE

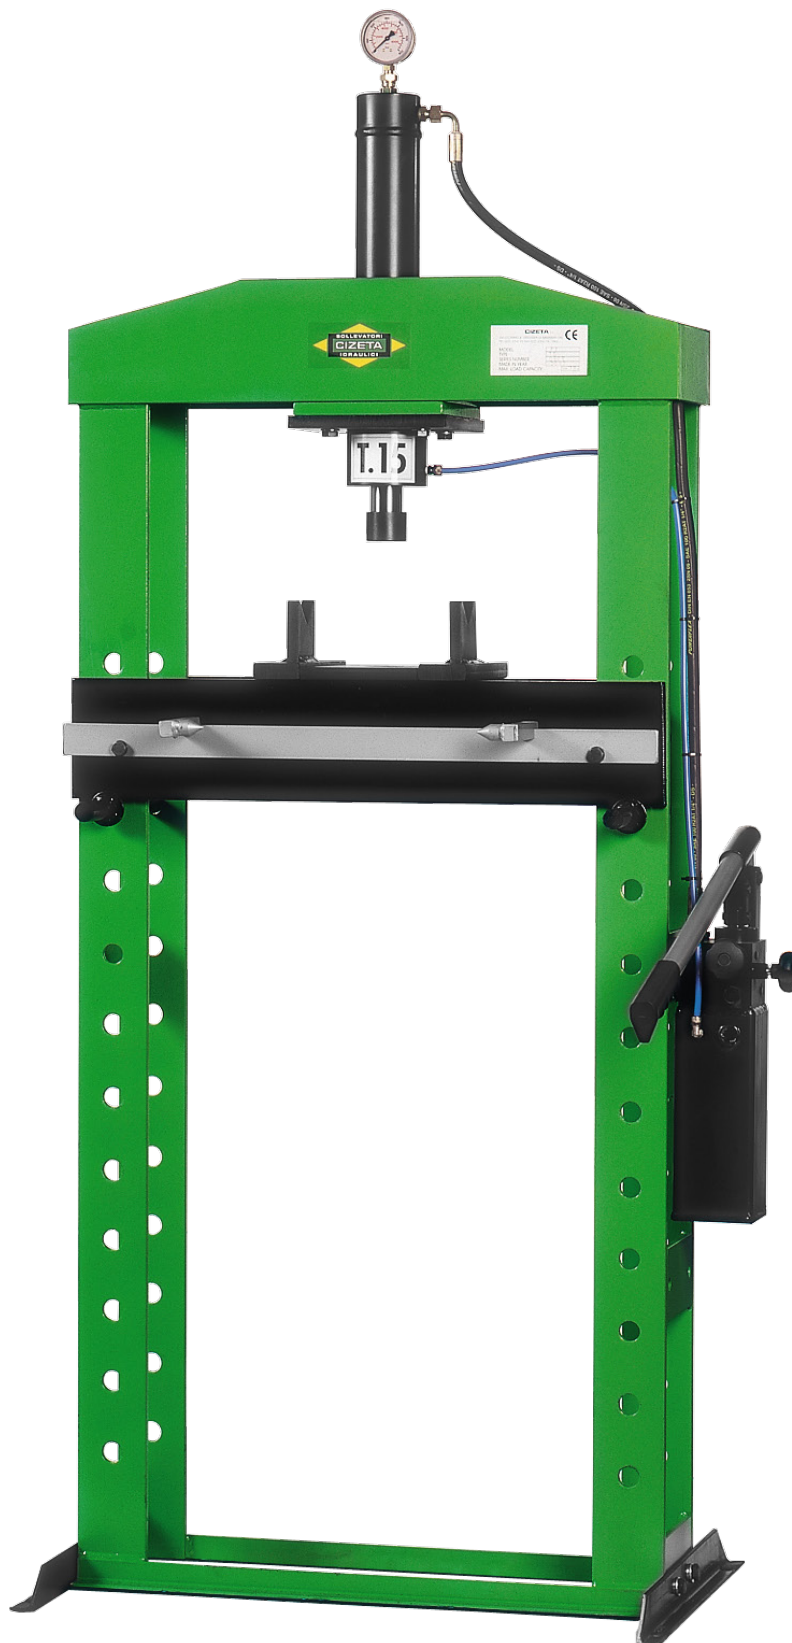

Tipo Type	Potenza Power TON.	A	B	C	D	E	F	G	Peso Weighth KG.
P.I. 10 B	10	1300	860	550	180	550	125	500	100
P.I. 10 N	10	1900	870	550	180	1100	125	500	115
P.I. 15	15	1950	930	570	180	1100	150	500	145
P.I. 20	20	2000	1000	620	180	1100	150	500	157
P.I. 30	30	2130	1200	700	200	1150	180	650	250
P.I. 50	50	2300	1300	800	200	1100	180	750	385
P.I. 70	70	2300	1350	920	200	1000	250	750	690
P.I. 100	100	2300	1530	1020	200	1000	265	850	950

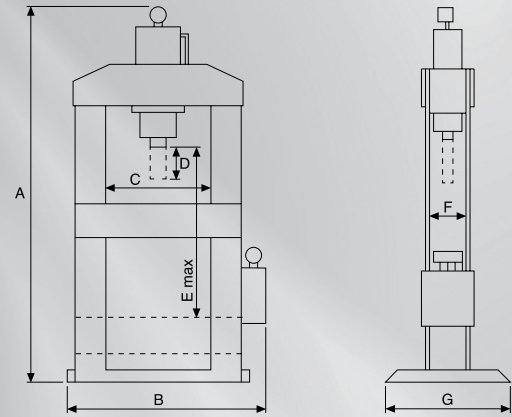

Presses idrauliche manuali con pompa a due velocità di lavoro, con rientro automatico del pistone.

L'avanzamento rapido si ottiene chiudendo i due volantini, mentre l'alta pressione si ottiene aprendo il volantino laterale.

Tutte le presse vengono fornite con due prismi a "V", piatto e manometro per il controllo della pressione d'esercizio.

Tutte le macchine (escluso i modelli P.I. 10B, P.I.10N, P.I. 15, P.I.20) sono dotate di argano per il sollevamento del piano di lavoro. Tutte le presse vengono fornite complete di olio e di sistema di drenaggio "aria-olio" e piattello protezione stelo.

Gli steli sono in acciaio speciale, trattato e cromato a spessore.

Two speed hand pump hydraulic presses with automatic re-entry of the piston.

By closing the two upper hand wheels on gets the fast piston approach. By opening the side upper hand wheels on gets the high pressure.

All the presses are supplied with two "v" blocks, plate and gauge to control the working pressure.

All the machines (models P.I. 10 B, P.I.10N, P.I.15,P.I.20 excepted) are equipped with winch for the hoisting of the working table.

All the presses are furnished complete of oil and drain system "air-oil" and plate for protection of the piston.

The ram are in special steel treated and chromium-platted.

