


Mastercool uses only **(GRADE 5 HOSE)** with a selection of standard and nylon barrier for high pressure applications. Knurled brass nuts make finger tightening easy. **Crimped with 8 segment dies for secure fit and maximum durability.** Hoses are available in sets and a variety of lengths to meet all EPA, SAE and UL requirements for containment of refrigerant.

- Sets include one blue, one red and one yellow hose
- Hoses assembled with teflon gaskets, add a -T to the p/n
- For special length hoses, please inquire

## STANDARD & HIGH PRESSURE HOSES WITH STANDARD FITTINGS (1/4" SAE)

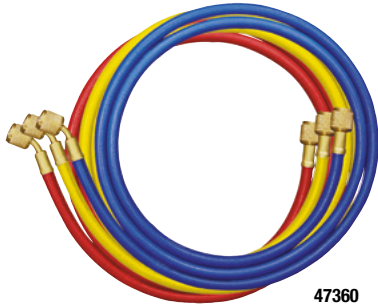

47360

### Standard Hoses, Working Pressure 41 BAR, Burst 210 BAR

HOSE LENGTH	90 cm	150 cm	180 cm	250 cm	3 m	5 m
Blue 1/4" x 1/4"	41361	41601	41721	41961	41961-120	41961-200
Yellow 1/4" x 1/4"	41362	41602	41722	41962	41962-120	41962-200
Red 1/4" x 1/4"	41363	41603	41723	41963	41963-120	41963-200
<b>SETS 1/4" x 1/4"</b>	<b>40336</b>	<b>40360</b>	<b>40372</b>	<b>40396</b>	<b>40396-120</b>	<b>40396-200</b>

### Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR

Blue 1/4" x 1/4"	47361	47601	47721	47961	47961-120	47961-200
Yellow 1/4" x 1/4"	47362	47602	47722	47962	47962-120	47962-200
Red 1/4" x 1/4"	47363	47603	47723	47963	47963-120	47963-200
Black 1/4" x 1/4"	47364	47604	47724	47964	N/A	N/A
<b>SETS 1/4" x 1/4"</b>	<b>47336</b>	<b>47360</b>	<b>47372</b>	<b>47396</b>	<b>47396-120</b>	<b>47396-200</b>
Black 1/4" hose with (3/8" x 3/8" fitting)	48364	48604	48724	48964	N/A	N/A

## R410A HOSES




49360-J

### Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR

HOSE LENGTH	90 cm	150 cm
Blue 5/16" SAE x 5/16" SAE	49361-J	49601-J
Yellow 5/16" SAE x 5/16" SAE	49362-J	49602-J
Red 5/16" SAE x 5/16" SAE	49363-J	49603-J
<b>SETS 5/16" SAE x 5/16" SAE</b>	<b>49336-J</b>	<b>49360-J</b>
Blue 1/4" x 5/16"	-	96411
Red 1/4" x 5/16"	-	96413
<b>SETS Blue/Red 1/4" x 5/16" and Yellow 1/4" x 1/4"</b>	<b>49336-JT</b>	<b>49360-JT</b>

## R134a HOSES WITH 1/2" ACME-F AND 14 MM-M AUTO A/C FITTINGS



84372

### Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR

HOSE LENGTH	90 cm	150 cm	180 cm	240 cm
Blue 14 mm-M x 1/2" ACME-F	84361	84601	84721	84961
Yellow with Shut-off Valve 1/2" ACME-F x 1/2" ACME-F	84362	84602	84722	84962
Red 14 mm-M x 1/2" ACME-F	84363	84603	84723	84963
Black 1/2" ACME-F x 1/2" ACME-F	84364	84604	84724	84964
Yellow without Shut-off Valve 1/2" ACME-F x 1/2" ACME-F	84365	84605	84725	84965
<b>SETS Blue/Red 14 mm-M x 1/2" ACME-F and Yellow with Shut-off Valve 1/2" ACME-F x 1/2" ACME-F</b>	<b>84336</b>	<b>84360</b>	<b>84372</b>	<b>84396</b>

Mastercool R134a charging hoses meet SAE J2196 specifications and are UL tested.